

wineo

THAT'S FLOORING

DESIGN FLOORING

**CONFIDENT IN STYLE.
LIVING AND WORKING.**

THAT'S FLOORING

CONTENTS

Confident in style	05
Product advantages	06
Application areas	08
Product composition	10
Product comparison	15
Surfaces	16
Collections	
wineo 400	18
wineo 600	30
Rigid Special	46
wineo 800	58
PERFECT FIT Accessories	76
Service	78
Awards & Quality	80
Collection overview	82
Symbols	85



CONFIDENT IN STYLE.

Where do we find inspiration? Where can we feel the spirit of the times? Our designers were looking for the latest trends – with the aim of creating extraordinary collections that are characterised in particular: by confidence in style.

The design flooring by wineo gives every room a special flair. It derives its inspiration from the warmth of nature or the cool concrete facades of fascinating cities. It convinces with its design and functionality for residential and commercial buildings.



PRODUCT ADVANTAGES

The permanently elastic wineo design flooring is impressively functional. Offering numerous product advantages and ease of use, it is a true favourite.



DURABLE

wineo design flooring is **non-staining**.
Even furniture and chair castors leave no trace.



EASY CARE

Thanks to the sealed finish, the design flooring is very **easy to clean**.



QUIET

The soft surface ensures **pleasant room acoustics**.



WARM TO THE FEET

The design flooring feels **pleasantly warm** and is ideally suitable for lying, playing and living on.



SUITABLE FOR UNDERFLOOR HEATING

Installed on underfloor heating, the design flooring conveys an extra sense of **cosy warmth**.



SUITABLE FOR DAMP AREAS

All wineo design flooring for gluing or clicking in are perfectly suitable **for damp rooms**, such as the kitchen or bathroom.



GENTLE ON THE ANKLES

Thanks to the **elastic surface**, the joints are protected.



SLIP-RESISTANT


The **tested surface** is reliably safe with every step.

APPLICATION AREAS

The wineo design flooring for gluing and clicking in, with utilisation classes between 23 and 42, is always the right choice – for domestic areas as much as for public buildings or the light industrial sector. Product thicknesses of 2 mm to 9 mm make it possible to install the design floor on virtually any technically adequate subsurface.

i

All wineo Design Floors are suitable for wet areas.

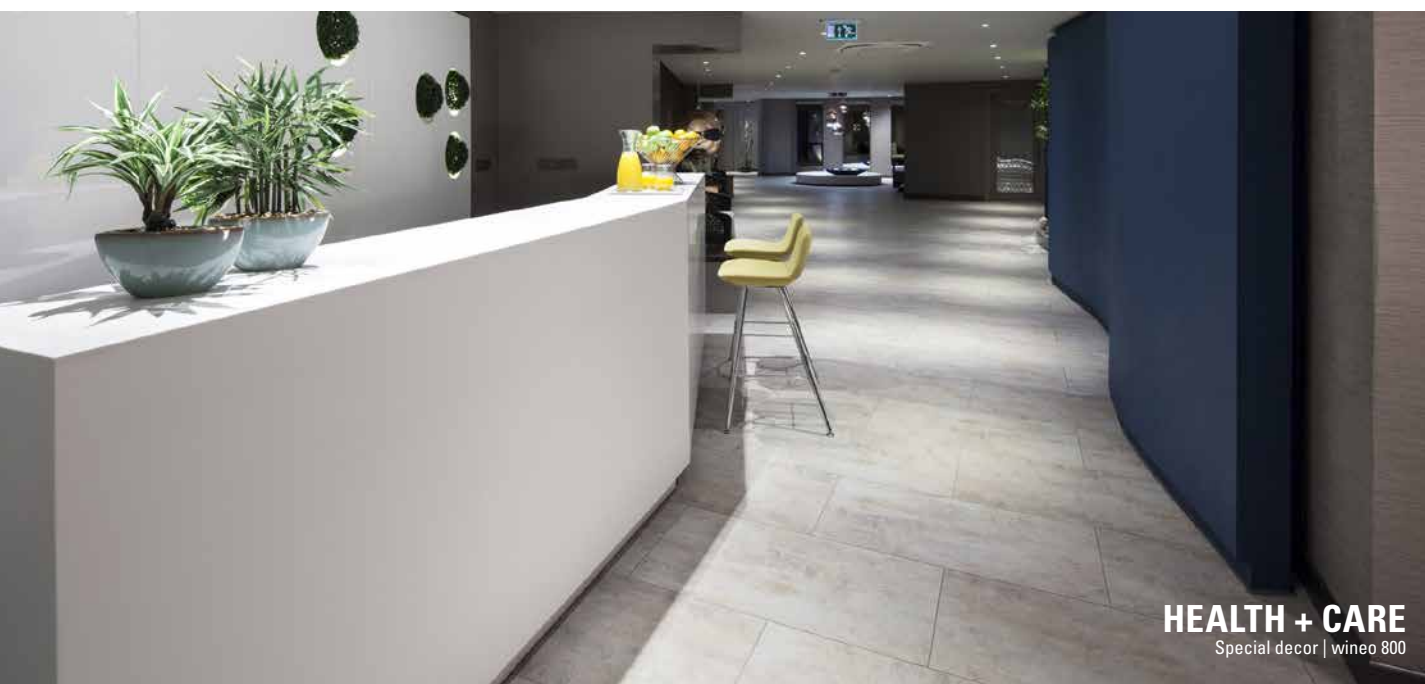




PRODUCT COMPOSITION

Design flooring from wineo is just as varied as your requirements. Whether you are looking for flooring for a new building, renovation, at home or for commercial use – wineo has the right product for you.

ELASTIC DESIGN FLOORING FOR GLUING



- minimal thickness of 2 mm to 2.5 mm
- particularly durable and long-lasting
- ideal for refurbishment work and damp areas

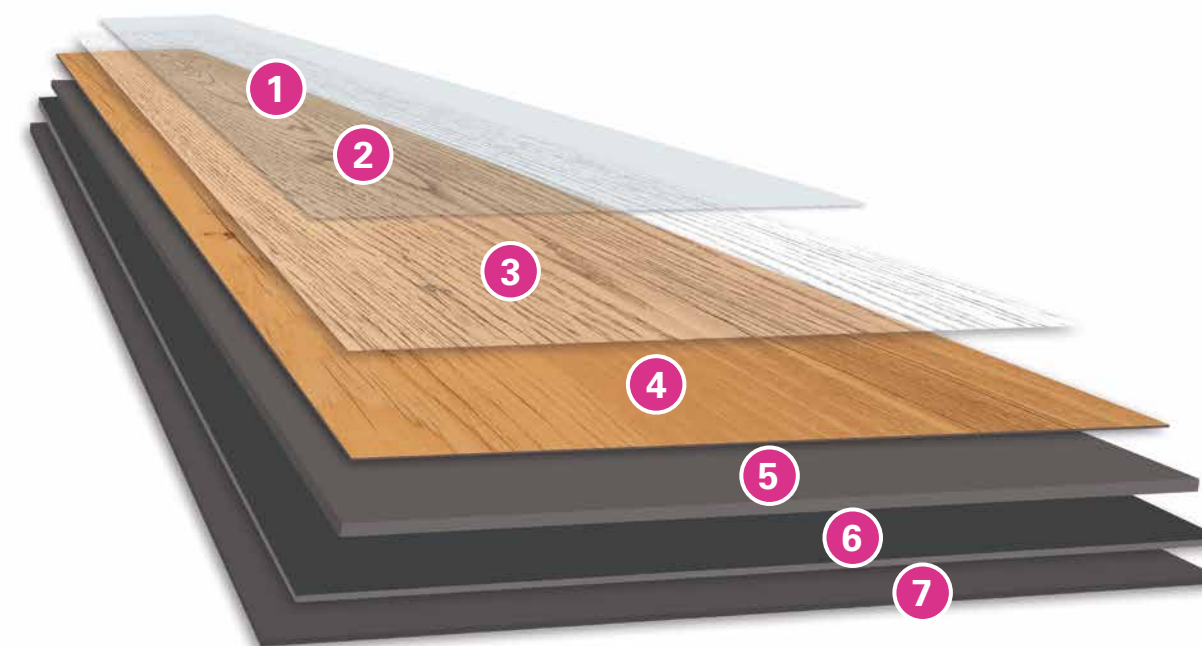

1 Surface seal

Protects the product and enables easy cleaning and maintenance.

2 Surface texture

A range of surface textures ensure an authentic feel and appearance.

3 Wear layer

Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.

4 Design

The decor film offers a host of design options.

5 Base layer

Lends the product a high level of dimensional stability and optimum point-load resistance.

6 Backing

With its waffle back texture, it is used to help ensure balance and optimal installation.


7 Underlay material

Available separately: The silentPREMIUM and silentPLUS underlay mat for bridging any unevenness and reducing walking and impact noise levels. For using these we grant +5 years on all standard guarantees.

ELASTIC DESIGN FLOORING FOR CLICKING IN



- very elastic
- available in a thickness of 4.5 mm to 5 mm
- connect locking for a particularly quick and tidy installation
- durable and long-lasting

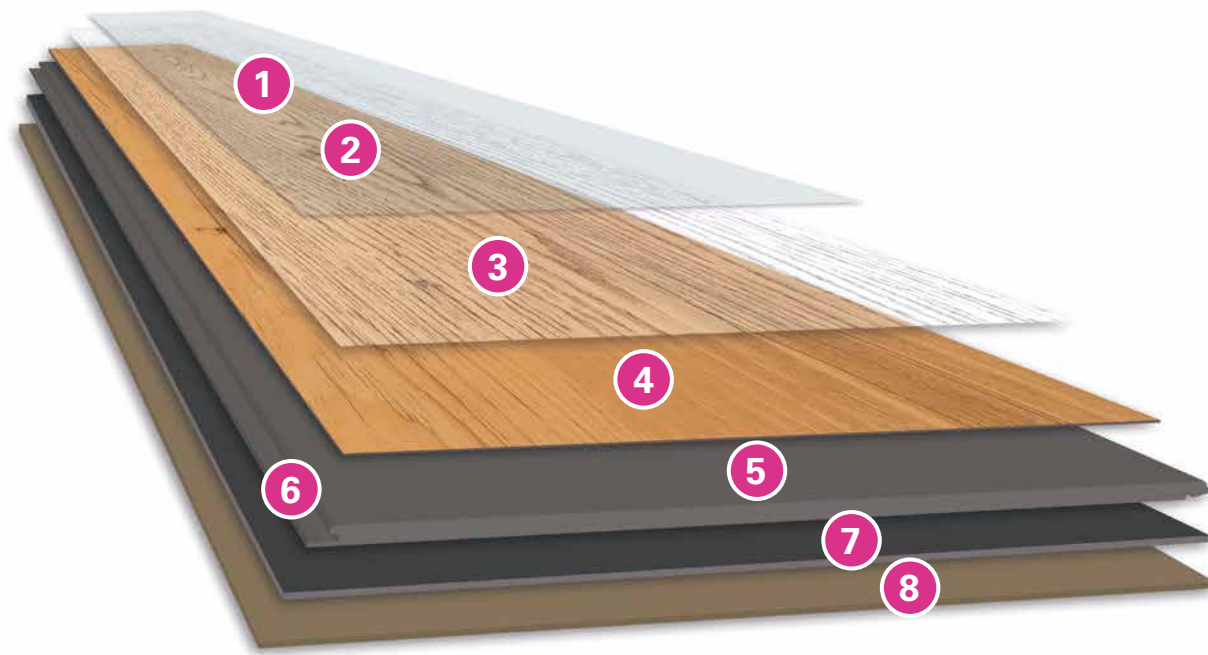


- 1 Surface seal**
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**
A range of surface texture ensure an authentic feel and appearance.
- 3 Wear layer**
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**
The decor film offers a host of design options.
- 5 Base layer with glass fibre reinforcement**
Lends the product an especially high level of dimensional stability and optimum point-load resistance.
- 6 Profile connection**
The Click locking system was especially developed for elastic design flooring and enables planks to be clicked into each other without any problems.
- 7 Backing**
With its waffle back texture, it is used to help ensure balance and optimal installation.
- 8 Underlay material**
Available separately: The silentCOMFORT underlay mat with non-slip effect for bridging any unevenness and reducing walking noise levels. For using these we grant +5 years on all standard guarantees.

MULTI-LAYER | RIGID DESIGN FLOORING FOR CLICKING IN



- design flooring surface on Aqua-Protect® HDF core board
- 9 mm thick for optimally bridging any unevenness in the substrate
- ideal for refurbishment work and damp areas
- particularly heat-resistant and dimensionally stable
- integrated soundPROTECT insulation mat for reducing walking and impact sound levels
- LocTec® locking for easy installation

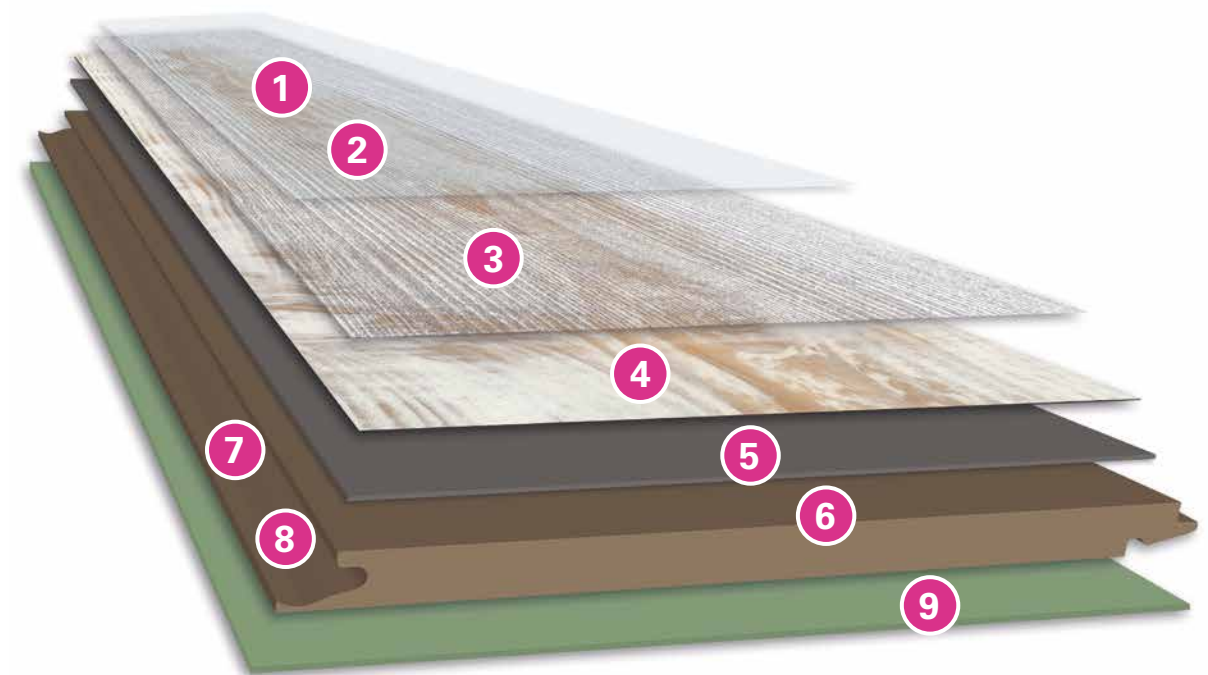


- 1 Surface seal**
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**
A range of surface textures ensure an authentic feel and appearance.
- 3 Wear layer**
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**
The decor film offers a host of design options.
- 5 Base layer**
Lends the product a high level of dimensional stability and optimum point-load resistance.
- 6 Core board**
The HDF Aqua-Protect® core board is swell-resistant.
- 7 Profile connection**
Thanks to the tried-and-tested LocTec® locking system, panels can be clicked into one another without any problems.
- 8 Profile seal**
A special profile seal protects the entire connection system from moisture.
- 9 Underlay material**
The walking and impact sound-reducing system soundPROTECT is already securely integrated into wineo Multi-Layer flooring.

SEMI-RIGID DESIGN FLOORING FOR CLICKING IN



- very solid product composition with Tele-Stop-function
- semi-rigid: construction of a sturdy product core with elastic layers
- very strong click connection
- with underlay mat silentRIGID more longer-lasting

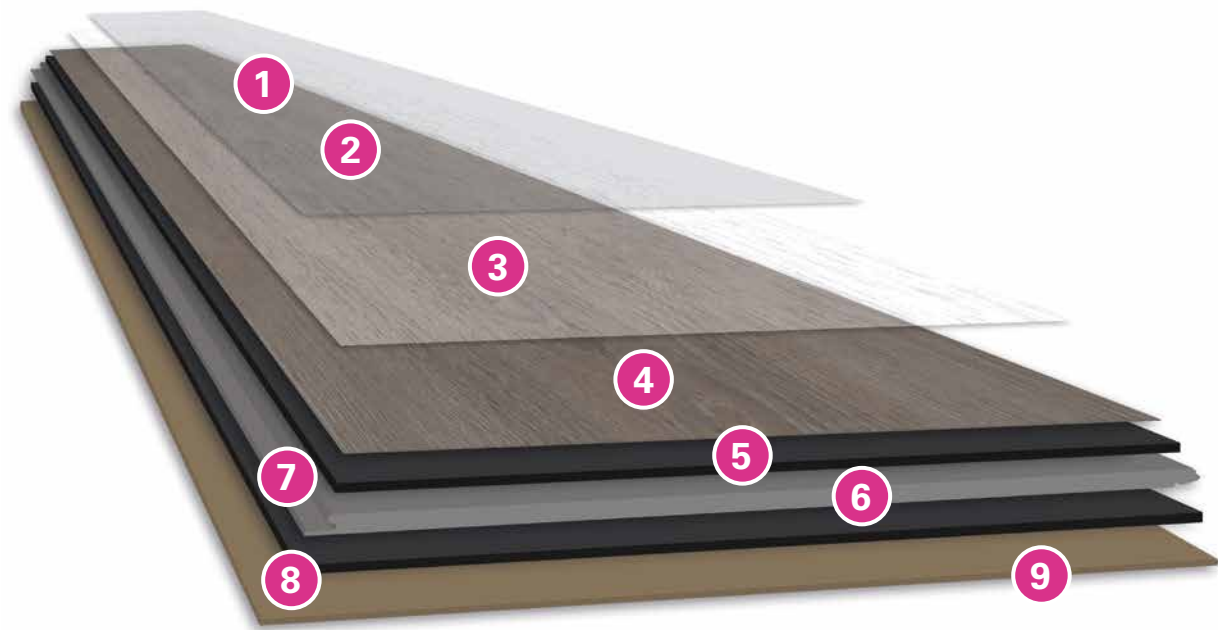

- 1 Surface seal**
Protects the product and enables easy cleaning and maintenance.

2 Surface texture
A range of surface textures ensure an authentic feel and appearance.

3 Wear layer
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.

4 Design
The decor film offers a host of design options.

5 Elastic top layer
Enables the product to remain flexible and free to move – despite the rigid core board.
- 6 Core board**
Extremely stably constructed product core with Tele-Stop-function, which prevents marking of the subfloor from tracing through.

7 Profile connection
The Click locking system was specially developed for design flooring and enables planks to be clicked into each other without any problems.

8 Elastic bottom layer
This enables the product to remain flexible and free to move – despite the rigid core board.

9 Underlay material
Available separately: The silentRIGID underlay mat stabilises the click-lock system and is also absorbing noise. For using these we grant +5 years on all standard guarantees.

More details can be found in our installation instruction under en.wineo.de

PRODUCT COMPARISON

wineo	400 600 800	400 800	400 Multi-Layer	600 Rigid	Conventional rigid floor (SPC) < 5 mm
Features	Elastic design flooring for gluing	Elastic design flooring for clicking in	Rigid design flooring for clicking in	Semi-rigid design flooring for clicking in	Rigid design flooring for clicking in
Watertightness	★ ★ ★	★ ★ ★	★ ★	★ ★ ★	★ ★ ★
Noise reduction	★ ★ ★	★ ★ ★	★ ★	★ ★	★
Walking comfort	★ ★ ★	★ ★ ★	★ ★	★ ★	★
Dimension stability	★ ★	★ ★	★ ★ ★	★ ★ ★	★ ★ ★
Locking stability	-	★	★ ★	★ ★	★ ★ ★
Tele-Stop-Function	★	★	★ ★ ★	★ ★ ★	★ ★ ★
Castor chair test type W 25,000 turns	passed	wineo 400 10,000 turns wineo 800 25,000 turns	passed	passed (with and without silentRIGID)	passed (only with silentRIGID)
Max. installation surface without a joint	-	150 m²	150 m²	400 m²	-
Fitting underlay mat	silentPREMIUM silentPLUS	silentCOMFORT	soundPROTECT (integrated)	silentRIGID	silentRIGID

- ★ standard
- ★ ★ good
- ★ ★ ★ especially good

SURFACES

wineo design flooring comes in different surfaces, which are designed to suit the decors. Wood structures, for example, ensure that your floor feels particularly authentic. Please refer to the labelling under the design pictures.



Fine wooden pore



Rough wood structure



Exclusive wood structure



Sand structure



Rough sawn surface



Stone structure



Slate structure



Travertine



Registered embossed surface



Brushed structure



Handscraped l



Glossy surface



Designs with a registered embossed surface look especially authentic, as the surface structure is in sync with the wood grain. The expression of knots and lines in the wood gives the floor its unique originality.



wineo 400

3-in-1

CONFIDENT IN STYLE. FEELING AT HOME.


The wineo 400 is a true all-rounder for your home: every design is available for gluing, clicking in or as a Multi-Layer variant for clicking in – for maximum creative freedom. Discover 18 wood and 10 stone designs as well as 12 wood designs in XL with a high-quality registered embossed surface. The collection is the stylistically assured entry-level variant in the field of design flooring and is ideal for private use.

wineo 400 wood | wood XL

Installation type: Glue
Product thickness: 2 mm | 2 mm
Wear layer: 0,3 mm | 0,3 mm
Planks / box: 18/3,89 m² | 12/4,24 m²

Installation type: Click
Product thickness: 4,5 mm | 4,5 mm
Wear layer: 0,3 mm | 0,3 mm
Planks / box: 10/2,27 m² | 6/2,12 m²

Installation type: Click (Multi-Layer)*
Core board: Aqua-Protect®
Product thickness: 9 mm | 9 mm
Wear layer: 0,3 mm | 0,3 mm
Planks / box: 9/2,00 m² | 6/2,10 m²

 Elastic 1200 × 180 mm

Elastic XL
1505 × 235 mm

 Elastic 1212 × 187 mm

Elastic XL
1507 × 235 mm

 Multi-Layer | Rigid 1222 × 182 mm

Multi-Layer | Rigid XL
1520 × 230 mm

i
wood XL with registered embossed surface

wineo 400 stone

Installation type: Glue
Product thickness: 2 mm
Wear layer: 0,3 mm
Planks / box: 18/3,34 m²

Installation type: Click
Product thickness: 4,5 mm
Wear layer: 0,3 mm
Planks / box: 12/2,28 m²

Installation type: Click (Multi-Layer)*
Core board: Aqua-Protect®
Product thickness: 9 mm
Wear layer: 0,3 mm
Planks / box: 9/1,68 m²

 Elastic 609,6 × 304,8 mm

 Elastic 600 × 316 mm

 Multi-Layer | Rigid 601 × 310 mm



Inspiration Oak Clear
wineo 400 wood | DB00113
wineo 400 wood | DLC00113
wineo 400 wood | MLD00113

Dream Pine Light **Glue:** DB00105
1 strip | Rough wood structure **Click:** DLC00105
Click (Multi-Layer): MLD00105

Moonlight Pine Pale **Glue:** DB00104
 1 strip | Rough wood structure **Click:** DLC00104
Click (Multi-Layer): MLD00104

Inspiration Oak Clear **Glue:** DB00113
1 strip | Rough wood structure **Click:** DLC00113
Click (Multi-Layer): MLD00113



Compassion Oak Tender **Glue:** DB00109
1 strip | Rough wood structure **Click:** DLC00109
Click (Multi-Layer): MLD00109



Desire Oak Light	Glue: DB00108
1 strip Rough wood structure	Click: DLC00108
	Click (Multi-Layer): MLD00108



Grace Oak Smooth **Glue:** DB00106
 1 strip | Rough wood structure **Click:** DLC00106
Click (Multi-Layer): MLD00106



Paradise Oak Essential **Glue:** DB00112
 1 strip | Rough wood structure **Click:** DLC00112
Click (Multi-Layer): MLD00112



Energy Oak Warm	Glue: DB00114
1 strip Rough wood structure	Click: DLC00114
	Click (Multi-Layer): MLD00114



Embrace Oak Grey **Glue:** DB00110
1 strip | Rough wood structure **Click:** DLC00110
Click (Multi-Layer): MLD00110



Spirit Oak Silver **Glue:** DB00115
 1 strip | Rough wood structure **Click:** DLC00115
Click (Multi-Layer): MLD00115



Adventure Oak Rustic **Glue:** DB00111
 1 strip | Rough wood structure **Click:** DLC00111
Click (Multi-Layer): MLD00111



Summer Oak Golden **Glue:** DB00118
1 strip | Rough wood structure **Click:** DLC00118
Click (Multi-Layer): MLD00118



Starlight Oak Soft **Glue:** DB00116
 1 strip | Rough wood structure **Click:** DLC00116
Click (Multi-Layer): MLD00116



Miracle Oak Dry **Glue:** DB00117
1 strip | Rough wood structure **Click:** DLC00117
Click (Multi-Layer): MLD00117



Soul Apple Mellow	Glue: DB00107
1 strip Rough wood structure	Click: DLC00107
	Click (Multi-Layer): MLD00107



Romance Oak Brilliant	Glue: DB00119
1 strip Rough wood structure	Click: DLC00119
	Click (Multi-Layer): MLD00119



Eternity = various plank colours
in one box



Eternity Oak Grey
1 strip | Rough wood structure

Glue: DB00121
Click: DLC00121
Click (Multi-Layer): MLD00121



Eternity Oak Brown
1 strip | Rough wood structure

Glue: DB00120
Click: DLC00120
Click (Multi-Layer): MLD00120



Eternity Oak Grey
wineo 400 wood | DB00121
wineo 400 wood | DLC00121
wineo 400 wood | MLD00121

wineo 400 wood

XL



Emotion Oak Rustic

1 strip | [Registered embossed surface](#)

Glue: DB00123

Click: DLC00123

Click (Multi-Layer): MLD00123



Ambition Oak Calm

1 strip | [Registered embossed surface](#)

Glue: DB00122

Click: DLC00122

Click (Multi-Layer): MLD00122



Wish Oak Smooth

1 strip | [Registered embossed surface](#)

Glue: DB00131

Click: DLC00131

Click (Multi-Layer): MLD00131



Memory Oak Silver

1 strip | [Registered embossed surface](#)

Glue: DB00132

Click: DLC00132

Click (Multi-Layer): MLD00132



Valour Oak Smokey

1 strip | [Registered embossed surface](#)

Glue: DB00133

Click: DLC00133

Click (Multi-Layer): MLD00133



Luck Oak Sandy

1 strip | [Registered embossed surface](#)

Glue: DB00127

Click: DLC00127

Click (Multi-Layer): MLD00127



Liberation Oak Timeless

1 strip | [Registered embossed surface](#)

Glue: DB00128

Click: DLC00128

Click (Multi-Layer): MLD00128



Comfort Oak Mellow

1 strip | [Registered embossed surface](#)

Glue: DB00129

Click: DLC00129

Click (Multi-Layer): MLD00129



Silence Oak Beige

1 strip | [Registered embossed surface](#)

Glue: DB00124

Click: DLC00124

Click (Multi-Layer): MLD00124



Kindness Oak Pure

1 strip | [Registered embossed surface](#)

Glue: DB00125

Click: DLC00125

Click (Multi-Layer): MLD00125



Joy Oak Tender

1 strip | [Registered embossed surface](#)

Glue: DB00126

Click: DLC00126

Click (Multi-Layer): MLD00126



Intuition Oak Brown

1 strip | [Registered embossed surface](#)

Glue: DB00130

Click: DLC00130

Click (Multi-Layer): MLD00130



Harmony Stone Sandy
Sand structure
Glue: DB00134
Click: DLC00134 (real joint)
Click (Multi-Layer): MLD00134



Magic Stone Cloudy
Travertin
Glue: DB00136
Click: DLC00136 (real joint)
Click (Multi-Layer): MLD00136



Patience Concrete Pure
Travertin
Glue: DB00139
Click: DLC00139 (real joint)
Click (Multi-Layer): MLD00139



Wisdom Concrete Dusky
Sand structure
Glue: DB00140
Click: DLC00140 (real joint)
Click (Multi-Layer): MLD00140



Fairytale Stone Pale
Sand structure
Glue: DB00142
Click: DLC00142 (real joint)
Click (Multi-Layer): MLD00142



Fortune Stone Rusty
Travertin
Glue: DB00143
Click: DLC00143 (real joint)
Click (Multi-Layer): MLD00143



Vision Concrete Chill
Sand structure
Glue: DB00135
Click: DLC00135 (real joint)
Click (Multi-Layer): MLD00135



Courage Stone Grey
Sand structure
Glue: DB00137
Click: DLC00137 (real joint)
Click (Multi-Layer): MLD00137



Glamour Concrete Modern
Sand structure
Glue: DB00141
Click: DLC00141 (real joint)
Click (Multi-Layer): MLD00141



Hero Stone Gloomy
Sand structure
Glue: DB00138
Click: DLC00138 (real joint)
Click (Multi-Layer): MLD00138

wineo 600

CONFIDENT IN STYLE. LEAD THE WAY.

Standing out in style while staying low on the ground.

The XL formats and trendy designs of wineo 600 are inspiring.



New York, London or Sydney – plenty of elegant styles for living and working with flair. And, with the click version wineo 600 rigid, every new look can be realised in no time at all.

Choose from 18 wood designs and 6 stone looks for gluing and clicking in – both versions are quick and easy to install. With a wear layer of 0.4 mm, the wineo 600 is perfect for both private homes and smaller commercial buildings.

wineo 600 wood | wood XL

Installation type: Glue
Product thickness: 2 mm
Wear layer: 0,4 mm
Planks / box: 18/3,89 m² | 12/4,24 m²



Installation type: Click
Product thickness: 5 mm
Wear layer: 0,4 mm
Planks / box: 8/1,80 m² | 6/2,12 m²


	Elastic	1200 × 180 mm
	Elastic	XL 1505 × 235 mm
	Semi-Rigid	1212 × 186 mm
	Semi-Rigid	XL 1507 × 234 mm

wineo 600 stone XL

Installation type: Glue
Product thickness: 2 mm
Wear layer: 0,4 mm
Tiles / box: 12/5,01 m²

Installation type: Click
Product thickness: 5 mm
Wear layer: 0,4 mm
Tiles / box: 6/2,14 m²

	Elastic	XL 914 × 457 mm
	Semi-Rigid	XL 748 × 477 mm



#BerlinLoft
wineo 600 wood XL | DB200W6
wineo 600 wood XL | RLC200W6

#Place



#NaturalPlace
1 strip | Exclusive wood structure

Glue: DB183W6
Click: RLC183W6



#WarmPlace
1 strip | Exclusive wood structure

Glue: DB184W6
Click: RLC184W6



#SmoothPlace
1 strip | Exclusive wood structure

Glue: DB185W6
Click: RLC185W6



#CozyPlace
1 strip | Exclusive wood structure

Glue: DB186W6
Click: RLC186W6



#ElegantPlace
1 strip | Exclusive wood structure

Glue: DB187W6
Click: RLC187W6



#ModernPlace
1 strip | Exclusive wood structure

Glue: DB188W6
Click: RLC188W6



#WarmPlace
wineo 600 wood | DB184W6
wineo 600 wood | RLC184W6

#Loft



#CopenhagenLoft
1 strip | **Registered embossed surface**

XL

Glue: DB189W6
Click: RLC189W6



#MilanoLoft
1 strip | **Registered embossed surface**

XL

Glue: DB190W6
Click: RLC190W6



#BarcelonaLoft
1 strip | **Registered embossed surface**

XL

Glue: DB191W6
Click: RLC191W6



#LisbonLoft
1 strip | **Registered embossed surface**

XL

Glue: DB192W6
Click: RLC192W6



#LondonLoft
1 strip | **Registered embossed surface**

XL

Glue: DB193W6
Click: RLC193W6



#SydneyLoft
1 strip | **Registered embossed surface**

XL

Glue: DB194W6
Click: RLC194W6



#LisbonLoft
wineo 600 wood XL | DB192W6
wineo 600 wood XL | RLC192W6

wineo 600 wood XL

#Loft



#AmsterdamLoft
1 strip | Registered embossed surface

XL

Glue: DB195W6
Click: RLC195W6



#ViennaLoft
1 strip | Registered embossed surface

XL

Glue: DB196W6
Click: RLC196W6



#NewYorkLoft
1 strip | Registered embossed surface

XL

Glue: DB197W6
Click: RLC197W6



#MoscowLoft
1 strip | Registered embossed surface

XL

Glue: DB198W6
Click: RLC198W6



#ParisLoft
1 strip | Registered embossed surface

XL

Glue: DB199W6
Click: RLC199W6



#BerlinLoft
1 strip | Registered embossed surface

XL

Glue: DB200W6
Click: RLC200W6




#ParisLoft
wineo 600 wood XL | DB199W6
wineo 600 wood XL | RLC199W6

#Factory



#SoHoFactory
Sand structure

Glue: DB205W6
Click: RLC205W6 (real joint)

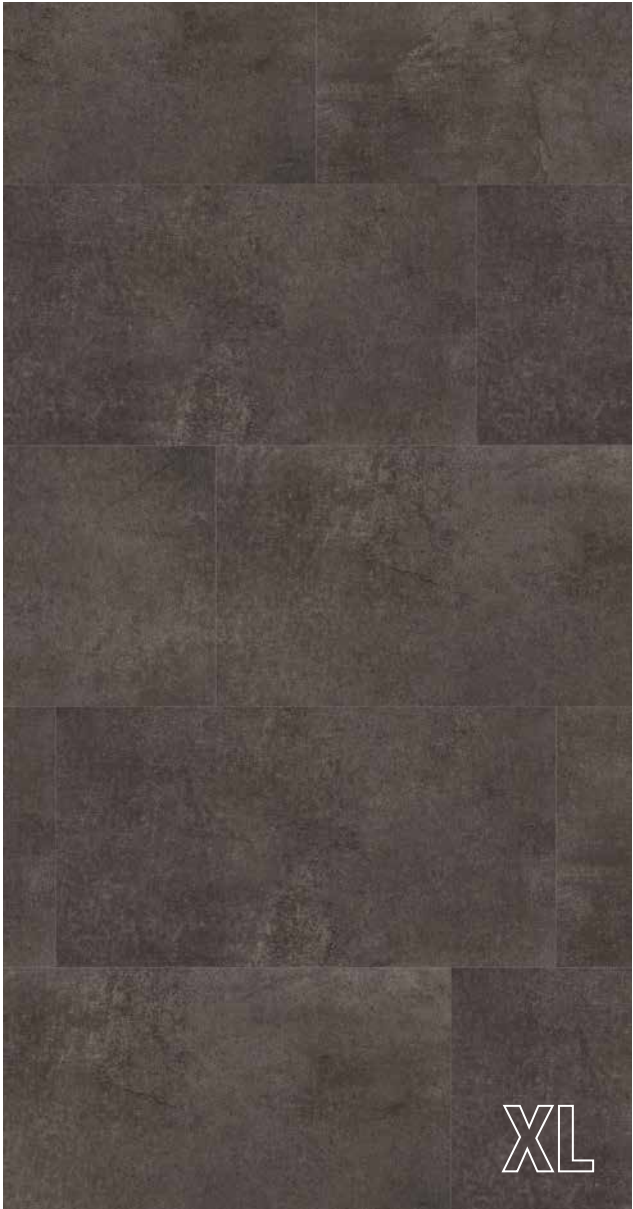

#BrooklynFactory
Sand structure

Glue: DB206W6
Click: RLC206W6 (real joint)



#BrooklynFactory
wineo 600 stone XL | DB206W6
wineo 600 stone XL | RLC206W6

#Factory



#NoordFactory
Sand structure
Glue: DB201W6
Click: RLC201W6 (real joint)



#CamdenFactory
Sand structure
Glue: DB202W6
Click: RLC202W6 (real joint)



#ChelseaFactory
Sand structure
Glue: DB203W6
Click: RLC203W6 (real joint)



#NewtownFactory
Sand structure
Glue: DB204W6
Click: RLC204W6 (real joint)



#NewtownFactory
wineo 600 stone XL | DB204W6
wineo 600 stone XL | RLC204W6



#DRESS YOUR FLOOR

**New style, new attitude to life.
The way you dress, the way you live.
Contemporary, self-confident, stylish**

wineo 600 rigid turns your home into a catwalk: Trendy, urban designs that are incredibly fast, simple and well laid. Preferably to the new look today ... wineo 600 rigid- just the right floor for varied so quiet uses!



ONE
CLICK
BETTER!

RIGID
SPECIAL

IN THIS SPECIAL YOU WILL FIND

- ... what Rigid products are all about
- ... why wineo rigid is ideal for refurbishment
- ... what distinguishes wineo rigid from other rigid floors
- ... which supporting role the underlay mat silentRIGID plays
- ... why you should not believe everything you hear about the Rigid floors.



wineo 600 rigid

ROBUST MULTI-TALENT WITH URBAN CHARACTER

Now you can create trendy looks even faster. When using wineo 600 rigid refurbishment is a click better right from the start!

This rigid design floor can be installed over an existing surface without the sub-floor imperfections being visible. The low construction height, extremely stable click connection and high walking comfort are further convincing arguments for wineo 600 rigid. And there's more of them!

NICKNAME: **RENOVATION FLOOR**

Why is wineo 600 rigid also called “renovation floor”? This is because the floor can be laid quickly and cleanly and, with existing floor coverings, hardly any substrate preparation is necessary. The results are so comfortable, stable and stylish that you will simply be amazed. This floor can be laid over existing substrates without trial and error, without the thickness becoming too high. No grinding down or tearing anything out. Few tools, little dirt – the ideal renovation floor.



RIGID

RIGID WHAT DOES THAT EVEN MEAN?

ri|gi|d
“rigid, stiff.”

The term “rigid” is currently on everyone’s lips when it comes to floor coverings. Rigid floors are multilayer design coverings with rigid carrier boards – also known as Rigid Core or Rigid Board. They belong to the product group of floating click design floors.

Rigid design floor is a variant of the design covering to click. Instead of an elastic product core, a hard carrier board is used for rigid design floors. This gives the floor a better shape and locking stability.

PRODUCT BENEFITS

THE TOP 5

1. HARD BUT ELASTIC

Thanks to the smart product construction, wineo rigid is significantly stronger than classic, elastic floors, but at the same time gentle on the joints, sound-absorbing and pleasantly warm to the feet.



2. DURABLE AND STABLE

In contrast to many other Rigid floors, the robust design floor passes the “Type W” chair roller test with 25,000 revolutions, which confirms its longevity. In the system with the new wineo silentRIGID underlay mat, this performance is additionally increased and the whole package is even quieter.



3. TELE-STOP FUNCTION

Minor unevenness on existing substrates does not telegraph through. What was there before can no longer be seen.



4. LOW OVERALL HEIGHT

The wineo Rigid floor measures just 5 mm, plus the additional silentRIGID underlay mat of only 1.2 mm. That makes a slim 6.2 mm overall.

5. WATERPROOF

Thanks to the water-resistant properties of wineo 600 rigid, it can be used without hesitation in humid areas.



PERFECT FIT underlay mat

POWERFUL COMBINATION WITH BEST PERFORMANCE

It's the mat that counts!

The silentRIGID underlay mat was specially developed for rigid design floors. Only through the combination of rigid flooring and matching underlay mat do all the benefits of your new floor really come into their own, silentRIGID provides stability, quietness and a pleasant feeling when walking with a low product thickness of 1.2 mm.

The underlay mat and floor together measure just 6.2 mm in height – a „slim miracle“ for easy renovation.



PERFECT

THE UNDERLAY MAT IMPRESSES WITH

- ... BEST RESULTS IN THE CASTOR CHAIR TEST
- ... HIGH COMPRESSIVE STRENGTH
- ... LONG DURABILITY
- ... HIGH NOISE REDUCTION
- ... SUSTAINABLE RAW MATERIALS
- ... EXCELLENT PRODUCT QUALITY


#silentRIGID



1 Roll out mat.



2 Cut to size.

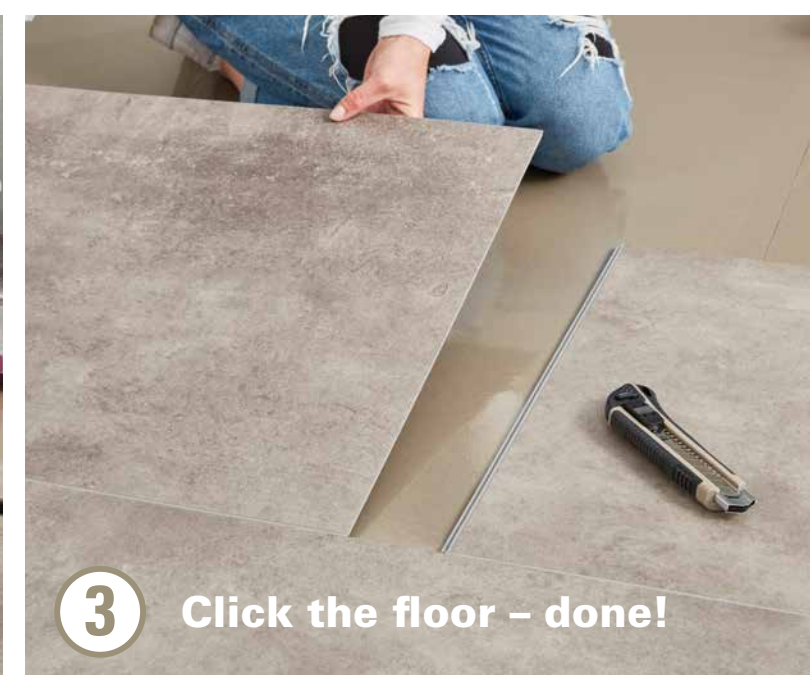

3 Click the floor – done!

Castor chair test

WINEO RIGID HOLDS AND HOLDS

We have subjected various rigid floors with underlay products (IXPE, XPS, PU underlays) to the Type V test procedure. wineo rigid was one of the few to pass the test with flying colours. Especially with the PU underlay mat silentRIGID, the click connection is so stable that you can even throw a party on this floor.



TEST
THE
BEST



Rigid floor with sophisticated construction

SOFT SHELL, HARD CORE


The design of wineo rigid combines two seemingly contradictory properties: The stability of the rigid core with the elasticity of a classic design floor.

For this we have chosen a kind of "sandwich structure", in which the core consists of a rigid polymer material coated with elastic outer layers. This makes our Rigid more elastic than conventional rigid floors and more stable than classic design covering. Most rigid floors are constructed with a rigid product structure. Our construction, which is positioned precisely between these two variants, combines the best properties from the two worlds of elastic and rigid design floors.

Product superstructures

CONVENTIONAL RIGID FLOOR VS.


Most rigid floors consist of a rigid, immovable construction.
The structure of wineo 600 rigid makes the design floor robust and stable, yet it remains flexible.

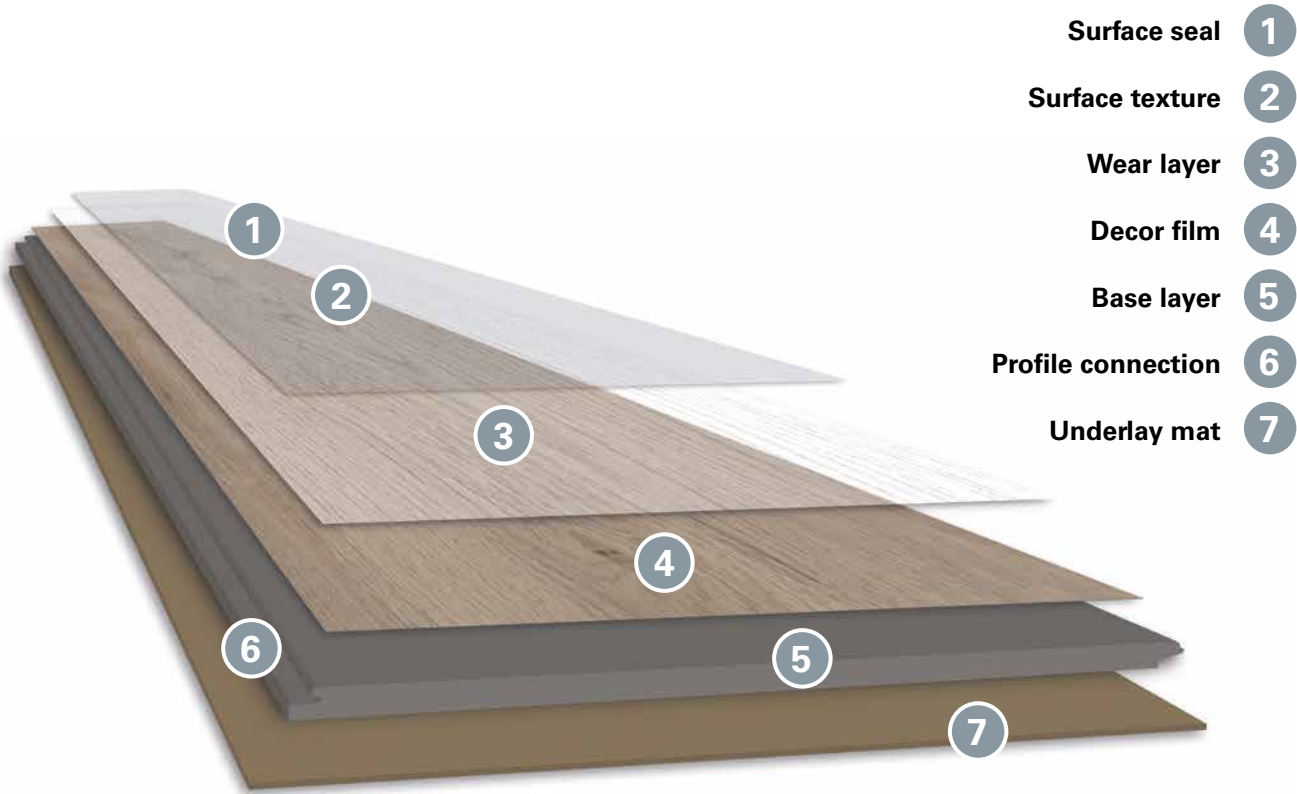

COMMON
RIGID CONSTRUCTION

- STURDY CONSTRUCTION
- NO TELEGRAPHING
- 3.5-5 MM PRODUCT CONSTRUCTION
- MATERIAL: RIGID (HARD)
- LOUD
- POOR WALKING COMFORT
- UNDERLAY MAT

DESIGN FLOOR
WINEO 600 RIGID

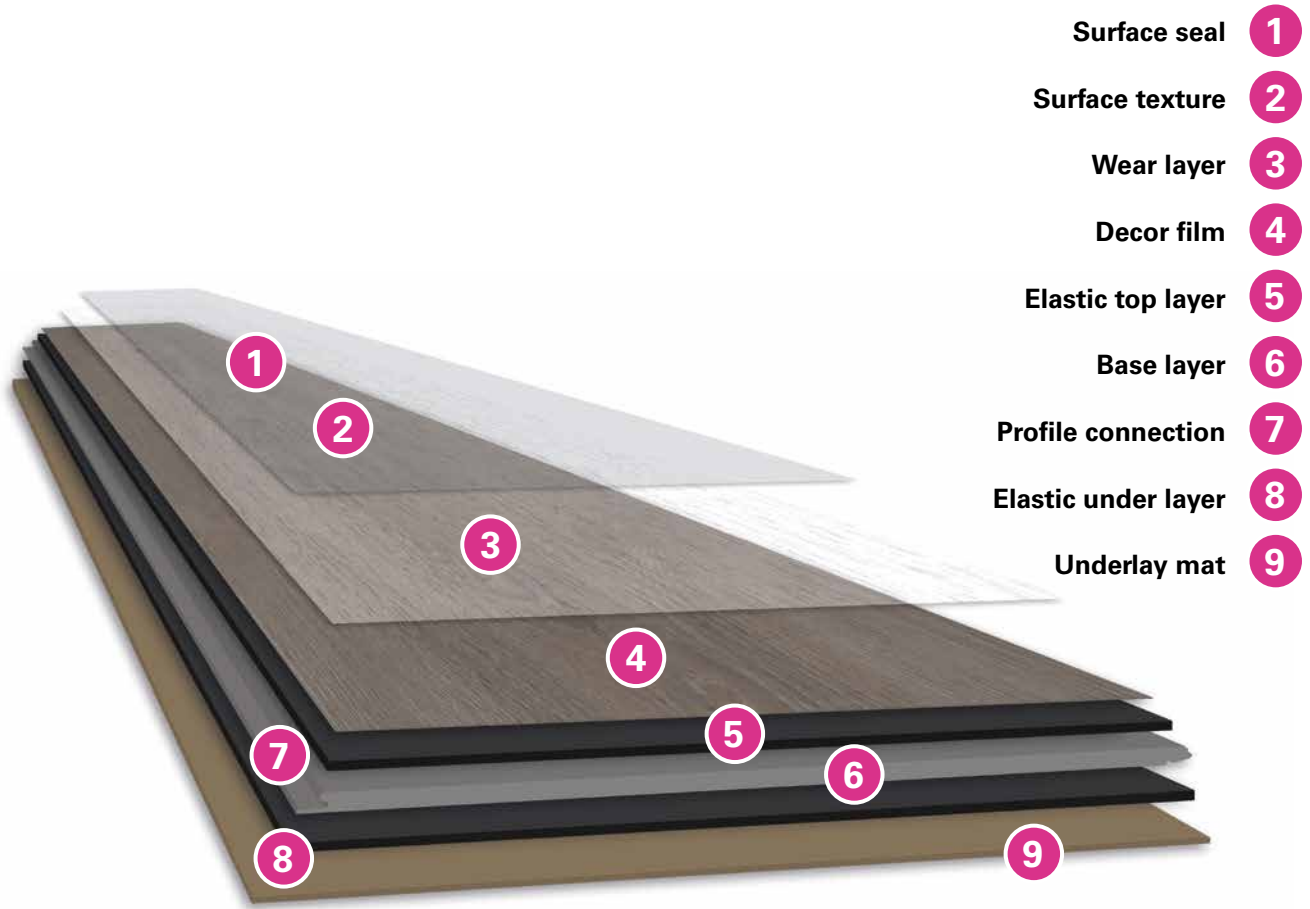

THE
BETTER
DESIGN
FLOOR

THE SPECIAL
WINEO 600 RIGID

- STURDY CONSTRUCTION
- NO TELEGRAPHING
- 5 MM PRODUCT CONSTRUCTION
- MATERIAL: SEMI-RIGID (HARD & ELASTIC)
- QUIET
- HIGH WALKING COMFORT
- UNDERLAY MAT

A little history

DEVELOPMENT OF CLICK PRODUCTS

The first **"click"** was in laminate flooring in the early 1990s. With the associated simplified installation, the click floor began its triumphant march. And that was just the beginning of the success story.

With the existing pioneer knowledge, an adhesive-free option for quick installation was developed shortly afterwards for design floors as well. In addition, the design covering could be laid even faster than the laminate and was also waterproof. The attractiveness of this easy-to-clean and hard-wearing flooring increased further as a result. For more stability and durability, a click variant with HDF carrier board was produced, which conquered the market as a multi-layer design floor.

To add to this, the wineo innovation team worked on a new, very stable carrier material, which appeared on the market for the first time in 2015 under the name Rigid.

The constructions used to date gave these floors good dimensional stability, durability and water resistance, but they lacked elasticity. Wineo wanted to maintain this important property. But how? After some development time this question was clarified, so that now wineo 600 Rigid floor can be presented in combination with a suitable silentRIGID underlay mat.

Everyone is proud of the result today. And rightly so: The new, semi-rigid floor from wineo combines all the benefits of the previously developed click design floors and scores with additional performance.

INNOVATION

1990

LAMINATE
FLOORING

2005

ELASTIC
DESIGN
FLOOR

2010

HDF
MULTI
LAYER

2015

RIGID
DESIGN
FLOOR

2020

WINEO
600
RIGID

TIME

RIGID ≠ RIGID

6 MYTHS ABOUT RIGID FLOORS

Many statements about rigid floors are circulating on the market. They clearly state the many benefits of hard-wearing design covering, not all of which are verifiable. So that you can enjoy your new Rigid floor for a long time, we are going to explain what these assertions are all about.

Harder is better

"Rigid is always better than an elastic design floor."

Rigid floors have many benefits due to their hardness. But if you compare them to classic, elastic design coverings, rigid floors, thanks to the use of SPC, are rigid, noisy and not so pleasant to walk on. **We have therefore developed a rigid floor that has a stable product core while the outer layer remains elastic.**

1

No problem with a conservatory

"All Rigid products can easily be laid in conservatories."

Wrong conclusion! Only because the rigid floor is dimensionally stable, i.e. can tolerate heat well, it is not automatically suitable for conservatories. This is because the surface can change under extreme sunlight in the same way as with other floor coverings.

2

No need to warm up

"Rigid floors can be laid directly without acclimatization."

Even though the floors look as hard as stone, these materials are still adjusting. **We therefore recommend that the product be left in the room to be worked on up to 24 hours before installation.**

3

Mat not always necessary

"Rigid floors can be laid without underlay mats."

We do not advise that. Most Rigid floors are constructed in such a way that they would be much too noisy without the underlay mat. **We recommend using an underlay mat in any case. With our silentRIGID, specially developed for rigid floors, the click connection is particularly stable.** Smaller unevenness of the substrate is compensated and the sound is further reduced.

4

Just put down and finished

"The substrate preparation is not necessary when laying Rigid floors."



This is a fallacy. We also recommend preparing the substrate for these floors ... even if smaller irregularities do not telegraph through. **We therefore speak of the "Tele-Stop" benefit with our rigid floor.**

5

Finally seamless

"Rigid can be laid throughout the house without expansion joints."

That is a frequently heard rigid myth. Rigid product is dimensionally stable, but there is no guarantee that the completely non-joint installation will work in the long term. **We recommend using at least expansion joints between the doors.** For further information please use our installation instructions.

6

Anna, Stylist

»As a stylist, I am on my feet all day long. So I appreciate every single minute of being on an elastic design flooring, which is gentle on the joints.«


**wineo 800**

CONFIDENT IN STYLE. MAKING AN IMPACT.


Developed with the help of trend scouts, wineo 800 provides plenty of impressive new inspiration. The collection offers 42 innovative designs for gluing or clicking in, in a total of 8 different formats. With a wear layer of 0.55 mm, wineo 800 is a premium design covering and is therefore ideal for commercial property and discerning private customers.

COMBINATIONS

wineo 800, in particular, offers plenty of opportunities for creatively combining various decors and formats for gluing. This means that any floor can be transformed, making it truly distinctive and unique.

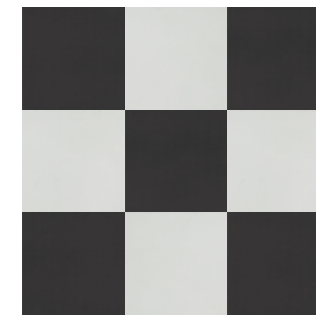

tile L

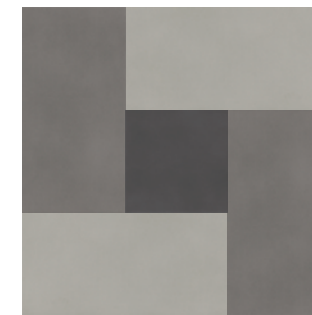


tile L | tile XL




tile L | tile XXL | craft




craft

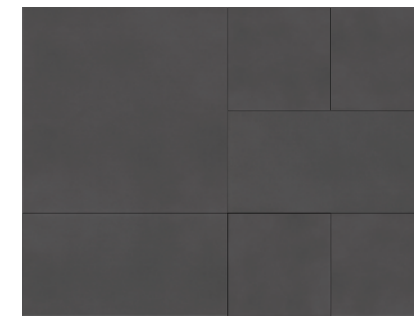


tile L | tile XL | tile XXL

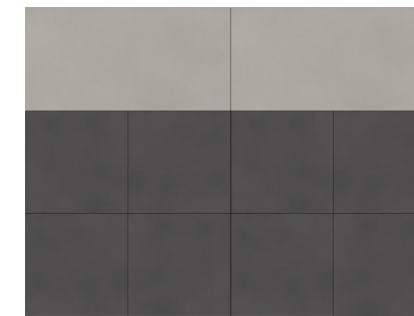

tile L | tile XL

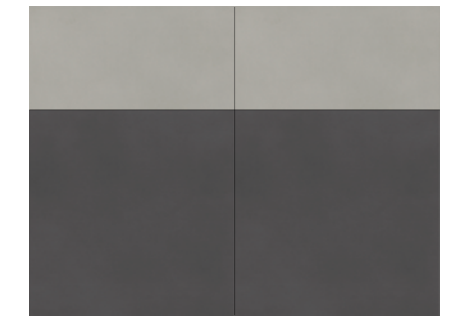

tile L | tile XXL

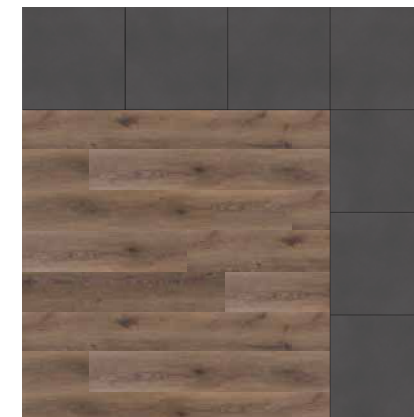

wood | tile



wood | craft



tile L | craft



tile XL



tile XL



craft



craft



wood | craft


wineo 800 wood | wood XL

Installation type: Glue
Product thickness: 2,5 mm | 2,5 mm
Wear layer: 0,55 mm | 0,55 mm
Planks / box: 16/3,46 m² | 12/4,24 m²

Installation type: Click
Product thickness: 5 mm | 5 mm
Wear layer: 0,55 mm | 0,55 mm
Planks / box: 8/1,79 m² | 6/2,14 m²

	Elastic	1200 × 180 mm
	Elastic	XL 1505 × 235 mm
	Elastic	1212 × 185 mm
	Elastic	XL 1505 × 237 mm

i
wood XL with registered embossed surfaced surface



APPLICATION AREAS

The possible applications are just as diverse as the collection itself: Retail & Fair, Public & Education or Hotel & Hospitality – wineo 800 has the right product for every object.



Mona, Gallery Owner
»For my exhibitions, it is important that the flooring provides a stage for the works of art so that their full effect can be appreciated. In the background, high-quality and hard-wearing. That's precisely what flooring should be.«

Helsinki Rustic Oak
wineo 800 wood XL | DB00068
wineo 800 wood XL | DLC0068

SCANDINAVIAN LIGHT WOOD



Copenhagen Frosted Pine
1 strip | Handscraped l
Glue: DB00076
Click: DLC00076



Gothenburg Calm Oak
1 strip | Exclusive wood structure
Glue: DB00077
Click: DLC00077



Riga Vibrant Pine
1 strip | Exclusive wood structure
Glue: DB00082
Click: DLC00082



Helsinki Rustic Oak
1 strip | **Registered embossed surface**
Glue: DB00068
Click: DLC00068



Lund Dusty Oak
1 strip | **Registered embossed surface**
Glue: DB00065
Click: DLC00065

NATURAL WARM WOOD

wineo 800 65



Salt Lake Oak
1 strip | Exclusive wood structure
Glue: DB00079
Click: DLC00079



Wheat Golden Oak
1 strip | Exclusive wood structure
Glue: DB00080
Click: DLC00080



Honey Warm Maple
1 strip | Exclusive wood structure
Glue: DB00081
Click: DLC00081



Clay Calm Oak
1 strip | **Registered embossed surface**
Glue: DB00062
Click: DLC00062



Corn Rustic Oak
1 strip | **Registered embossed surface**
Glue: DB00064
Click: DLC00064



Mud Rustic Oak
1 strip | **Registered embossed surface**
Glue: DB00063
Click: DLC00063



Joanne, Fashion Designer
»In my boutique, my customer's individuality is everything. The design of the shop should support the individual style of my clients.«

Sardinia Wild Walnut
wineo 800 wood | DB00083
wineo 800 wood | DLC00083

MEDITERRANEAN DARK WOOD

wineo 800 67



Balearic Wild Oak
1 strip | Exclusive wood structure

Glue: DB00078
Click: DLC00078



Crete Vibrant Oak
1 strip | Exclusive wood structure

Glue: DB00075
Click: DLC00075



Sardinia Wild Walnut
1 strip | Exclusive wood structure

Glue: DB00083
Click: DLC00083



Cyprus Dark Oak
1 strip | Registered embossed surface

Glue: DB00066
Click: DLC00066



Santorini Deep Oak
1 strip | Registered embossed surface

Glue: DB00061
Click: DLC00061



Ponza Smoky Oak
1 strip | Registered embossed surface

Glue: DB00067
Click: DLC00067




Sicily Dark Oak
1 strip | Registered embossed surface

Glue: DB00069
Click: DLC00069

wineo 800 stone XL

Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Tiles / box: 10/4,18 m²

Installation type: Click
Product thickness: 5 mm
Wear layer: 0,55 mm
Tiles / box: 6/2,63 m²




wineo 800 tile L | tile XL | tile XXL

Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Tiles / box: 16/3,34 m²

Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Tiles / box: 10/4,18 m²


Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Tiles / box: 6/5,02 m²

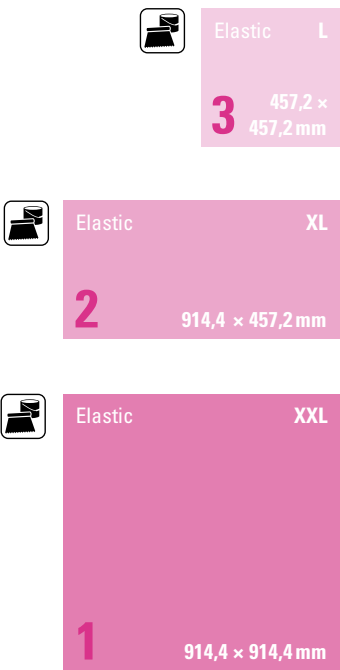


wineo 800 craft

Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Tiles / box: 16/3,34 m²


Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Planks / box: 20/1,86 m²



Lucas, Hotel Manager
»There's always a lot going on in our lobby. The design flooring successfully creates a peaceful atmosphere, both acoustically and visually.«

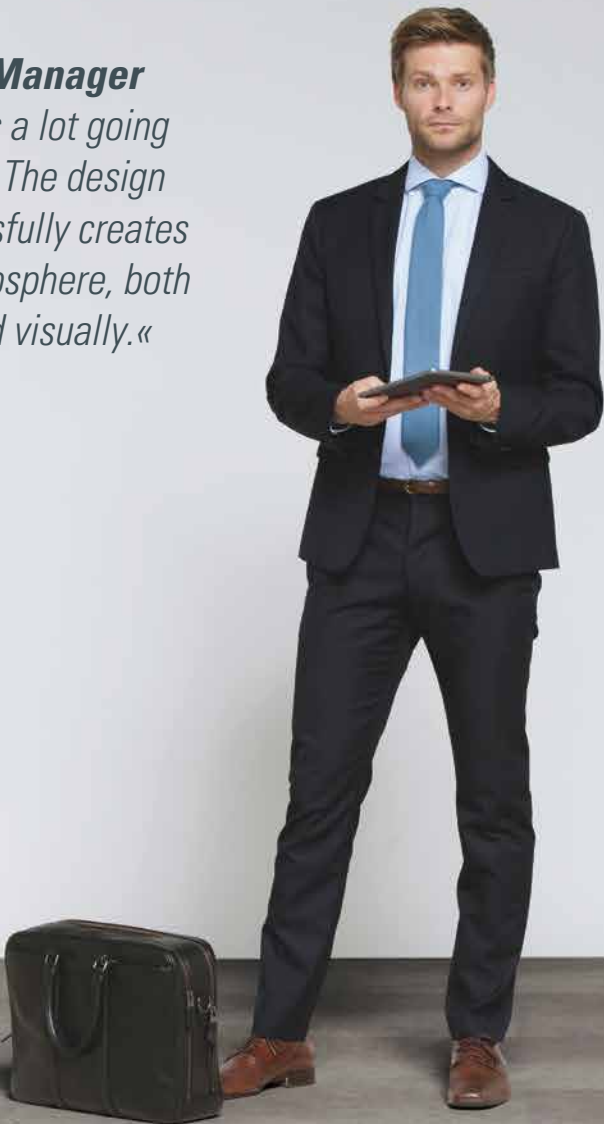

Raw Concrete
wineo 800 stone XL | DB00088
wineo 800 stone XL | DLC00088

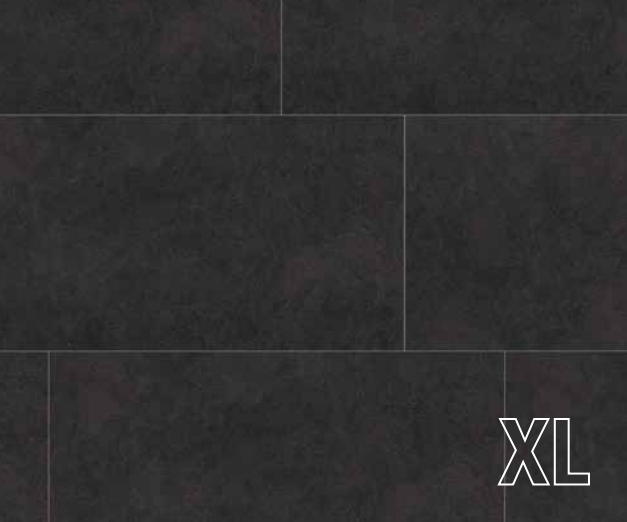

Dark Slate
1 strip | Slate structure



Silver Slate
1 strip | Slate structure



Raw Concrete
1 strip | Sand structure



Rough Concrete
1 strip | Sand structure



Copper Slate
1 strip | Stone structure



Light Sand
1 strip | Stone structure



Calm Concrete
1 strip | Sand structure



Heavy Metal
1 strip | Glossy surface




Art Concrete
1 strip | Sand structure



White Marble
1 strip | Sand structure

John, Architect

»Today’s requirements are high. Flooring is a design element, which has to fulfill two major requirements: functionality and design – both to a very high quality.«

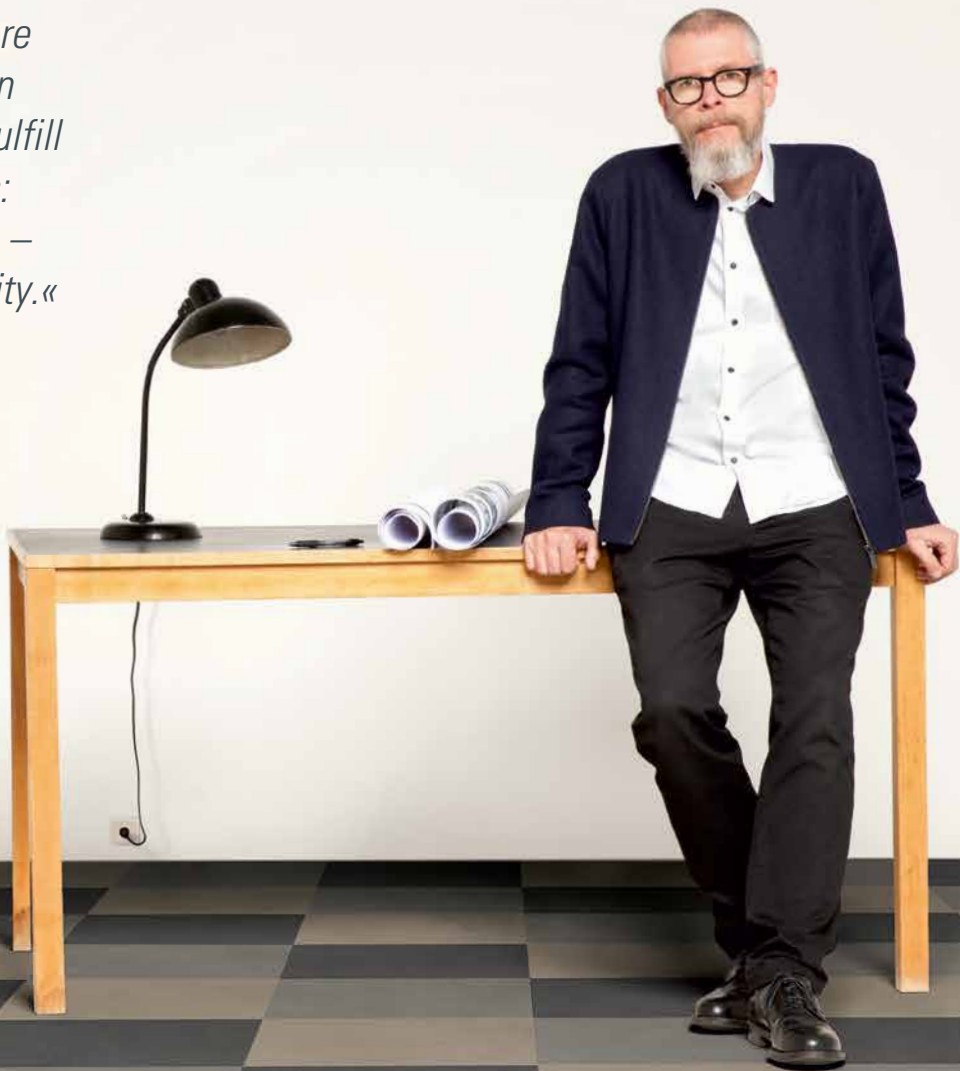

Solid Dark | Solid Grey | Solid Umbra
wineo 800 tile | DB00096-1
wineo 800 tile | DB00097-1
wineo 800 tile | DB00098-1

URBAN TILE DESIGN




Solid Dark
Sand structure

Glue: DB00096-1 (XXL)
Glue: DB00096-2 (XL)
Glue: DB00096-3 (L)



Solid Grey
Sand structure

Glue: DB00097-1 (XXL)
Glue: DB00097-2 (XL)
Glue: DB00097-3 (L)

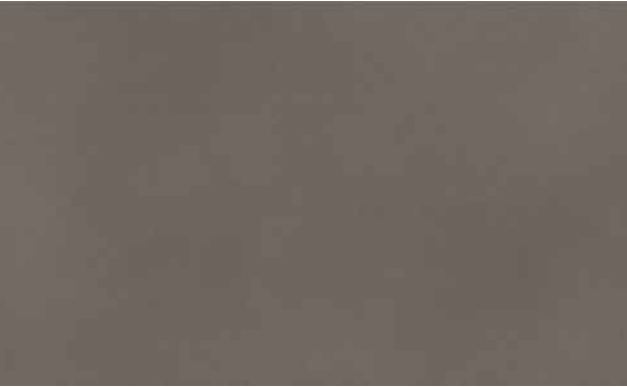

Solid Taupe
Sand structure

Glue: DB00099-1 (XXL)
Glue: DB00099-2 (XL)
Glue: DB00099-3 (L)



Solid Umbra
Sand structure

Glue: DB00098-1 (XXL)
Glue: DB00098-2 (XL)
Glue: DB00098-3 (L)



Solid Sand
Sand structure

Glue: DB00100-1 (XXL)
Glue: DB00100-2 (XL)
Glue: DB00100-3 (L)



Solid Light
Sand structure

Glue: DB00101-1 (XXL)
Glue: DB00101-2 (XL)
Glue: DB00101-3 (L)



Solid White
Sand structure

Glue: DB00102-1 (XXL)
Glue: DB00102-2 (XL)
Glue: DB00102-3 (L)



Solid Black
Sand structure

Glue: DB00103-1 (XXL)
Glue: DB00103-2 (XL)
Glue: DB00103-3 (L)

URBAN CRAFT DESIGN



Mosaic Dark
1 strip | Sand structure

Glue: DB00093



Mosaic Light
1 strip | Sand structure

Glue: DB00092



Infinity Dark Solid
1 strip | Exclusive wood structure

Glue: DB00073



Infinity Light Solid
1 strip | Exclusive wood structure

Glue: DB00074




Infinity Dark Mixed*
1 strip | Exclusive wood structure
* Mixed = various plank colours in one box

Glue: DB00071



Infinity Light Mixed*
1 strip | Exclusive wood structure

Glue: DB00072

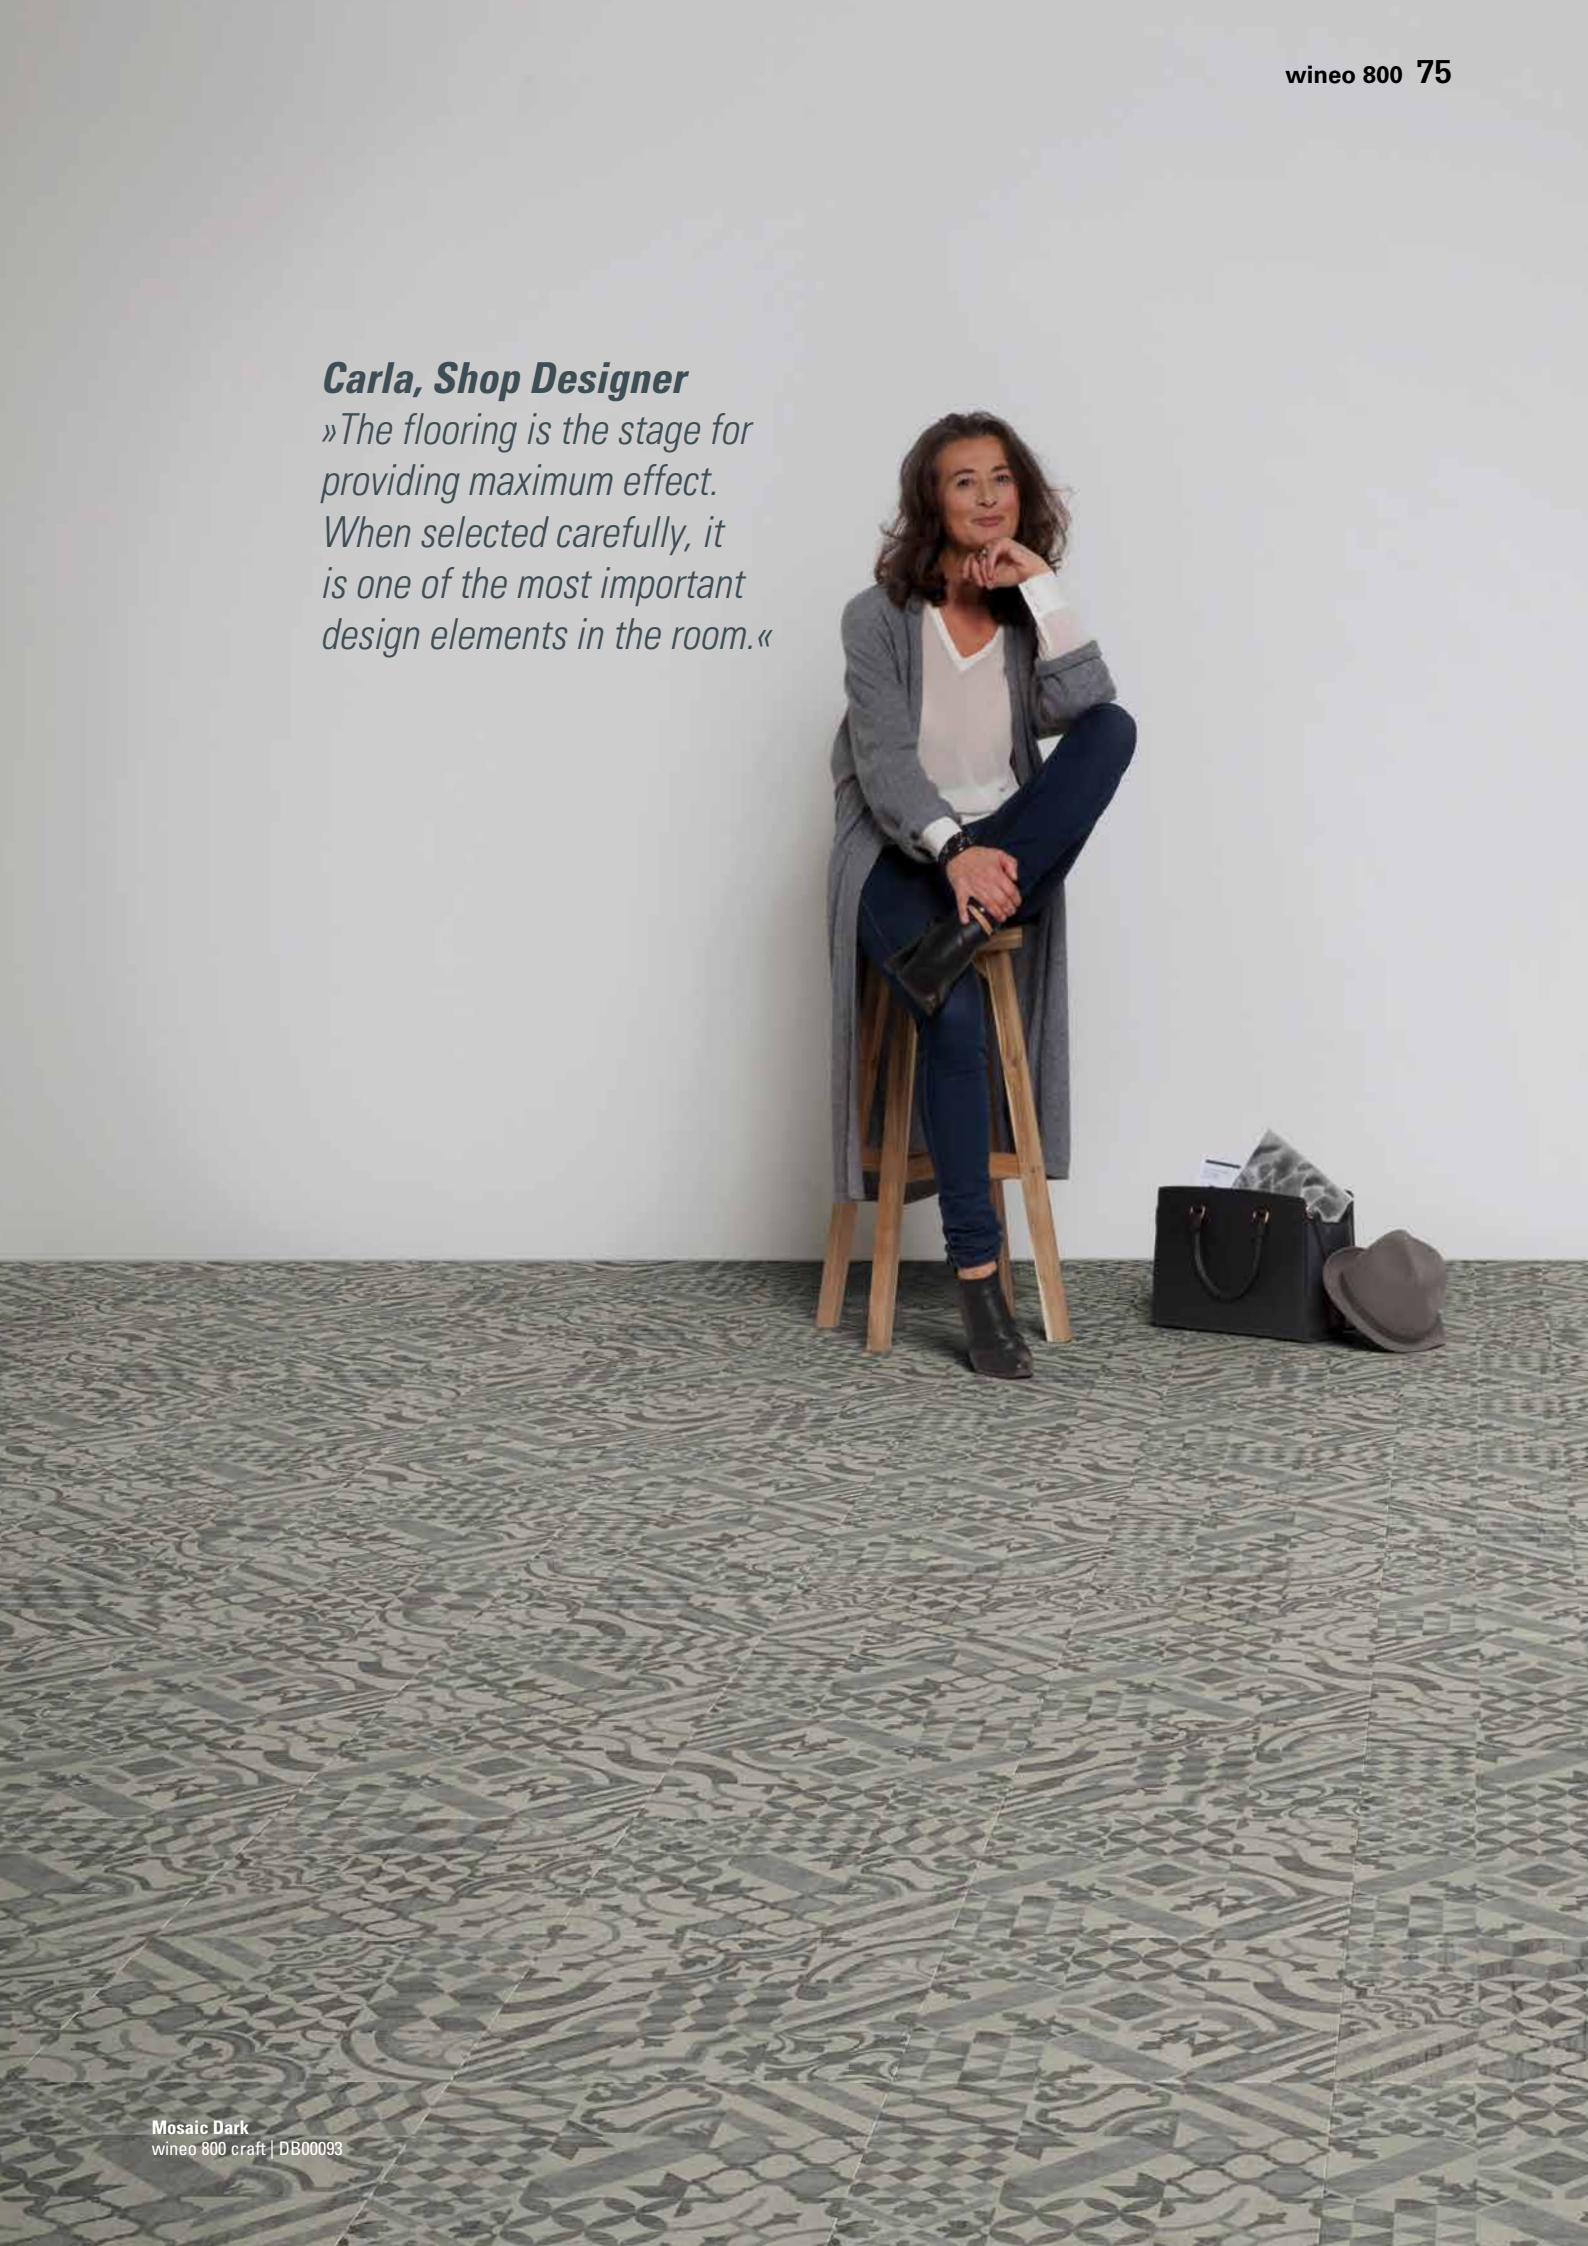

Carla, Shop Designer
»The flooring is the stage for providing maximum effect. When selected carefully, it is one of the most important design elements in the room.«

Mosaic Dark
wineo 800 craft | DB00093

PERFECT FIT ACCESSORIES

UNDERLAY MATERIAL

We recommend using our silentPREMIUM, silentPLUS, silentCOMFORT or silentRIGID underlay material with wineo design flooring. The basis is *ecuran*, a high-performance composite material which is predominantly made from vegetable oils such as canola or castor oil and naturally occurring mineral components such as chalk.

- fast, energy-efficient distribution of ground heat
- excellent noise reduction with hard and soft floor coverings
- long-life performance of at least 30 years
- excellent residual indentation behaviour
- sustainable raw materials
- without chlorine, plasticisers or solvents

silentPREMIUM

The premium class for the floating installation of elastic floor coverings for gluing



Self-adhesive top surface, floating installation, ultra-fast
Impact sound reduction: Up to 15 dB in the system with wineo design flooring for gluing. The application is possible up to utilisation classes 23 and 32.
Art. no. UPU1010

silentCOMFORT

The convenient mat for sturdy clicking installation of elastic floor coverings



Adhesive top surface, floating installation, ultra-sturdy
Impact sound reduction: Up to 16 dB in the system with wineo design flooring for clicking in.
Art. no. UCT1000

silentPLUS


Extra quietness for full-surface bonding of elastic floor coverings for gluing



Full-surface bonding above, self-adhesive below, ultra-quiet
Impact sound reduction: Up to 17 dB in the system with wineo design flooring for gluing.
Art. no. UPU1020

silentRIGID

The must-have for rigid floors for clicking in

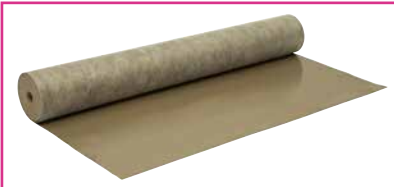

No break of the click connection, super stabilising, installed as a floating floor
Impact sound reduction: Up to 13 dB in the system with wineo rigid design flooring for clicking in.
Art. no. UPU1030



Detailed information can be found in our accessories brochure Art.-no. 20091021.

Download now:



www.blauer-engel.de/luz156



If a wineo PERFECT FIT PU underlay (soundPROTECT, soundSTOP, silentCOMFORT, silentPREMIUM, silentPLUS or silentRIGID) is used in combination with a suitable wineo flooring product, the wineo guarantee will be extended by 5 years.

FEATURE STRIPS

When installed between the panels, the feature strips create outstanding effects from an authentic plank or tile look to optically extending the length of the room. Whether in discrete colours or sharp contrast, the feature strips can be glued with all elastic wineo flooring.

Uni-Design	2 mm	2.5 mm
Anthracite	AAN20DL	AAN25DL
Cream	ACR20DL	ACR25DL
Dark brown	ADB20DL	ADB25DL
Black	ASW20DL	ASW25DL
Silver grey	ASG20DL	ASG25DL




STAIR NOSING

For all wineo 400 decors stair nosings are available:




TYP A
Single-curved edge, without click connection in the front

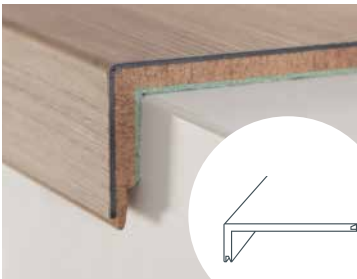

TYP B
Single-curved edge with additional click connection in the front for installing a block stage



TYP C
Double-curved edge, for wineo 400 Click

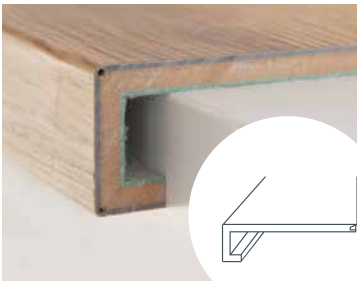

TYP C
Double-curved edge, for wineo 400 Multi-Layer

SKIRTINGS

- decor matching MDF skirtings for all wineo floor
- universally usable skirtings MDF as well as plastic/aluminium
- installation heights from 60 mm to 100 mm
- plastic mounting clips included in the range of accessories; alternatively glue or tack
- self-adhesive corner elements for easy installation



PROFILES

- Comfort Profiles (self-adhesive profiles) for do-it-yourselfer
- Premium Profiles (screwable profiles) for professionals
- profile types for different applications: transition-, adjustment and end profiles, L-end profiles, expansion joint profile, angle profiles and stair nosing profiles



SERVICE



TECHNICAL SUPPORT

Do you have any questions about our products, their areas-of application or their installation?

Our capable technical-team is happy to help you:

Tel.: +49 (0) 52 37 609 – 530




SEMINARS

Take advantage of our seminar offer to **improve your know-how, optimize your installation technique or sales strategy** and reap the benefits of a successful partnership. wineo product training seminars are informative, practical and tailored, and prepare you fully for working with our floors. You can find more information on our website, including how to register for a seminar.



MARKETING SUPPORT

We support you with a **wide range of samples and printed materials for product presentation and sales promotion at the POS**. You can find an overview of all our presentation media, from brochures to displays, in our sales promotion brochure, **"Advertising with wineo"**. Naturally, we can also work with you to tailor materials to your specific needs. Just get in touch!

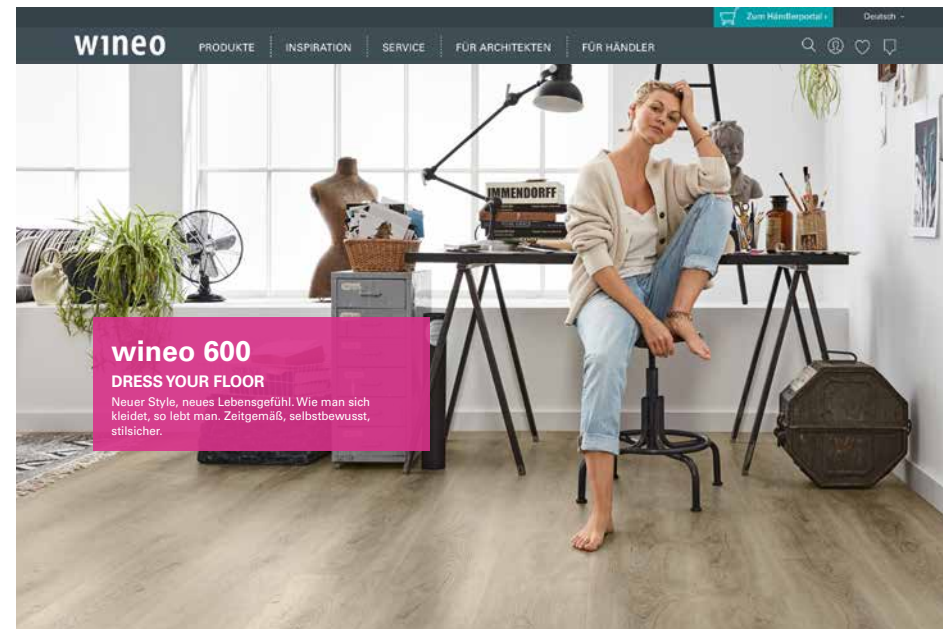

WINEO WEBSITE

On our website **en.wineo.de** you will find a lot of interesting information:

- information and references as well as relevant downloads on the products
- retailer portal with direct ordering option and query of product availability
- product search by characteristic, colour, format, installation height and utilisation class
- find a retailer
- video portal with plenty of tips and tricks, such as installation instructions



SOCIAL MEDIA

Inspiration and product-specific knowledge in exciting short articles – you can discover under:

- Instagram
- facebook
- YouTube
- Pinterest
- LinkedIn



WINEO FLOOR VIEWER

Any wineo floor can be simulated in your own home in an instant with our wineo Floor Viewer. The ideal way to choose the perfect flooring for you.

Test the wineo Floor Viewer now at **floorviewer.wineo.de**



THE BEST QUALITY FOR OVER 70 YEARS

For us, outstanding quality means more than an excellent product. As a family business in its 3rd generation we carry a high level of social and ecological responsibility. That's why we always provide you with the greatest possible level of transparency. And therefore even more safety.

- many quality controls from the initial mixing of the ingredients to the completion stage
- traceability of the exact time of production via a reverse-side overprint
- outstanding attributes regarding durability, maintenance and safety

WE FOCUS ON TRANSPARENCY.

Certifications



A+

Just like the "Blue Angel" in Germany, the A+ seal identifies our products as ecological, healthy and user friendly in the French market.



TFI-TÜV PROFICERT PREMIUM

The TFI (Textiles & Flooring Institute GmbH) and TÜV Hessen evaluate products from a quality, health and ecological point of view. Essentially, products can only be certified if they present no health risk.



CE marking

The CE marking confirms that our product has been tested and that it meets all EU requirements in terms of safety, healthcare and environmental protection.



(only for
wineo 600 rigid)



(only for wineo 400 Multi-Layer)

PEFC

The PEFC quality seal is based on very strict guidelines for managing our forests in a sustainable manner and guarantees that timber is used from verified cultivation sources. The entire product manufacturing process – from the raw materials through to the ready-to-use end product – is certified and verified by independent assessors.



factory made coated

Design floors from wineo are coated with a PU sealant at the factory, which makes them particularly hard-wearing and protects them from abrasion.





























Phthalate free

wineo floor coverings are phthalate-free. This means that only harmless plasticizers are used.



COLLECTION OVERVIEW

Collection	wineo 400 wood			wineo 400 wood XL			wineo 400 stone			wineo 600 wood		wineo 600 wood XL		wineo 600 stone XL		wineo 800 wood		wineo 800 wood XL		wineo 800 stone XL		wineo 800 tile			wineo 800 craft		
	Multi-Layer			Multi-Layer			Multi-Layer			Rigid		Rigid		Rigid								L	XL	XXL			
Installation type																											
Connection	-	Fold-Down	LogTec®	-	Fold-Down	LogTec®	-	Fold-Down	LogTec®	-	Fold-Down	.	Fold-Down	-	Fold-Down	-	Fold-Down	-	Fold-Down	-	Fold-Down	-	-	-	-	-	-
Core board	-	-	Aqua-Protect®	-	-	Aqua-Protect®	-	-	Aqua-Protect®	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Format	1200 × 180 mm	1212 × 187 mm	1222 × 182 mm	1505 × 235 mm	1507 × 235 mm	1520 × 230 mm	609.6 × 304.8 mm	600 × 316 mm	601 × 310 mm	1200 × 180 mm	1212 × 186 mm	1505 × 235 mm	1507 × 234 mm	914 × 457 mm	748 × 477 mm	1200 × 180 mm	1212 × 185 mm	1505 × 235 mm	1505 × 237 mm	914.4 × 457.2 mm	914 × 480 mm	457.2 × 457.2 mm	914.4 × 457.2 mm	914.4 × 914.4 mm	457.2 × 457.2 mm	914.4 × 101.6 mm	
Product thickness	2 mm	4.5 mm	9 mm	2 mm	4.5 mm	9 mm	2 mm	4.5 mm	9 mm	2 mm	5 mm	2 mm	5 mm	2 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm	2.5 mm	2.5 mm	
Wear layer	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	
Planks or tiles / box	18 / 3.89 m²	10 / 2.27 m²	9 / 2.00 m²	12 / 4.24 m²	6 / 2.12 m²	6 / 2.10 m²	18 / 3.34 m²	12 / 2.28 m²	9 / 1.68 m²	18 / 3.89 m²	8 / 1.80 m²	12 / 4.24 m²	6 / 2.12 m²	12 / 5.01 m²	6 / 2.14 m²	16 / 3.46 m²	8 / 1.79 m²	12 / 4.24 m²	6 / 2.14 m²	10 / 4.18 m²	6 / 2.63 m²	16 / 3.34 m²	10 / 4.18 m²	6 / 5.02 m²	16 / 3.34 m²	20 / 1.86 m²	
Boxes / pallet	60 / 233.40 m²	48 / 108.96 m²	44 / 88.00 m²	64 / 271.36 m²	52 / 110.24 m²	52 / 109.20 m²	60 / 200.40 m²	48 / 109.44 m²	60 / 100.80 m²	60 / 233.40 m²	56 / 100.80 m²	64 / 271.36 m²	48 / 101.76 m²	52 / 260.52 m²	44 / 94.16 m²	75 / 259.50 m²	64 / 114.56 m²	60 / 254.40 m²	56 / 119.84 m²	40 / 167.20 m²	44 / 115.72 m²	52 / 173.68 m²	40 / 167.20 m²	37 / 185.74 m²	52 / 173.68 m²	135 / 251.10 m²	
Surface treatment	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	
Bevelled edge	■	■	-	■	■	-	-	-	-	■	■	■	■	■	-	■	■	■	■	-	DLC00088 – 90. 94		■	■	■	■	■
Real joint	-	-	-	-	-	-	-	■	-	-	-	-	-	-	■	-	-	-	-	-	DLC00084 – 87 DLC00091.95		-	-	-	-	-
Utilisation class EN ISO 10874	23/31	23/31	23/31	23/31	23/31	23/31	23/31	23/31	23/31	23/32/41	23/32	23/32/41	23/32	23/32/41	23/32	23/33/42	23/33	23/33/42	23/33	23/33/42	23/33	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	
Binder content EN ISO 10582	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	
Reaction to fire EN 13501-1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1		
Anti slip category DIN 51130	R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10	
Slip resistance EN 13893	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS		
Anti-static properties EN 1815	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	-	≤ 2 kV	-	≤ 2 kV	-	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	
Staining / Chemical resistance EN ISO 26987																											
High resistance level depending on concentration and exposure time.*																											
Light fastness EN ISO 105-B02 (procedure 2)	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	
Residual indentation EN ISO 24343-1 in combination with silentPREMIUM	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm ~ 0.17 mm	
Castor chair test ISO 4918	-	-	-	-	-	-	-	-	-	25,000 revolutions, no damage with rolls type W																	
Suitability for underfloor heating																											
Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C.																											
Thermal resistance (m²K) / W EN12667 in combination with silentCOMFORT	~ 0.011 -	~ 0.012 ~ 0.022	≤ 0.058 -	~ 0.011 -	~ 0.012 ~ 0.022	≤ 0.058 -	~ 0.011 -	~ 0.012 ~ 0.022	≤0.058 -	≤ 0.011 -	≤ 0.05 -	≤ 0.011 -	≤ 0.05 -	≤ 0.011 -	≤ 0.05 -	≤ 0.015 -	≤ 0.021 ≤ 0.031	≤ 0.015 -	≤ 0.021 ≤ 0.031	≤ 0.015 -	≤ 0.021 ≤ 0.031	≤ 0.015 -	≤ 0.015 -	≤ 0.015 -	≤ 0.015 -	≤ 0.015 -	
in combination with silentPREMIUM	~ 0.021 -	-	-	~ 0.021 -	-	-	~ 0.021 -	-	-	≤ 0.021 -	-	≤ 0.021 -	-	≤ 0.021 -	-	≤ 0.025 -	-	≤ 0.025 -	-	≤ 0.025 -	-	≤ 0.025 -	≤ 0.025 -	≤ 0.025 -	≤ 0.025 -	≤ 0.025 -	
in combination with silentRIGID	-	-	-	-	-	-	-	-	-	-	~ 0.06	-	~ 0.06	-	~ 0.06	-	-	-	-	-	-	-	-	-	-	-	
Impact sound reduction EN ISO 16251-1 in combination with silentCOMFORT	~ 4 dB -	~ 7 dB ~ 16 dB	~ 14 dB -	~ 4 dB -	~ 7 dB ~ 16 dB	~ 14 dB -	~ 4 dB -	~ 7 dB ~ 16 dB	~ 14 dB -	~ 4 dB -	~ 6 dB -	~ 4 dB -	~ 6 dB -	~ 4 dB -	~ 6 dB -	~ 4 dB -	~ 7 dB ~ 16 dB	~ 4 dB -	~ 7 dB ~ 16 dB	~ 4 dB -	~ 7 dB ~ 16 dB	~ 4 dB -	~ 4 dB -	~ 4 dB -	~ 4 dB -	~ 4 dB -	
in combination with silentPREMIUM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
in combination with silentPLUS	~ 17 dB -	-	-	~ 17 dB -	-	-	~ 17 dB -	-	~ 17 dB -	~ 17 dB -	-	~ 17 dB -	-	~ 17 dB -	-	~ 17 dB -	-	~ 17 dB -	-	~ 17 dB -	-	~ 17 dB -	~ 15 dB ~ 17 dB	~ 15 dB ~ 17 dB	~ 15 dB ~ 17 dB	~ 15 dB ~ 17 dB	
in combination with silentRIGID	-	-	-	-	-	-	-	-	-	-	~ 13 dB	-	~ 13 dB	-	~ 13 dB	-	-	-	-	-	-	-	-	-	-	-	
Dimensional stability EN ISO 23999	~ 0.15 %	~ 0.1 %	-	~ 0.15 %	~ 0.1 %	-	~ 0.15 %	~ 0.1 %	-	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.15 %	~ 0.15 %	~ 0.15 %	~ 0.15 %	
Guarantee for private use according to Windmöller warranty conditions	15 years	15 years	20 years	15 years	15 years	20 years	15 years	15 years	20 years	20 years	20 years	20 years	20 years	20 years	20 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	
Extended warranty for laying PU underlay mat	+5 years	+5 years	already integrated	+5 years	+5 years	already integrated	+5 years	+5 years	already integrated	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	
Designs	18			12			10			6		12		6		9		9		10		8			2		
Page	22 – 25			26 – 27			28 – 29			34 – 35		36 – 39		40 – 43		52 – 55		52 – 55		58 – 59		60 – 61			62 – 63		

*For wineo 600 rigid: Resistance to staining EN 438-2
Group 1 + 2: Measurement 5
Group 3: Measurement 4

i

■ R 10 applies for all designated decors, except "Heavy Metal"

■ Cleaning and maintenance instructions online at www.wineo.de/Service

■ All decors shown in this brochure are reproductions. Windmöller GmbH provides no guarantee with regard to mistakes, printing errors and technical changes.

SYMBOLS

INSTALLATION TYPES



Glue



Click

PRODUCT FEATURES



Suitability for chair castors



Bevelled edge



Real joint



PU surface coating



UV surface coating



Underlay mat soundPROTECT



Tele-Stop

UTILISATION CLASSES



Utilisation class 23:
Domestic area
with intensive usage



Utilisation class 31:
Commercial sector
with low or occasional usage



Utilisation class 32:
Commercial sector
with average usage



Utilisation class 33:
Commercial sector
with heavy usage



Utilisation class 41:
Light industry sector
with moderate usage



Utilisation class 42:
Light industry sector
with regular usage

GARANTIE



15 year guarantee (for private application)



20 year guarantee (for private application)



25 year guarantee (for private application)



30 year guarantee (for private application)

Windmüller GmbH

Nord-West-Ring 21

D-32832 Augustdorf

Tel.: +49 (0) 52 37 609 - 0

Fax: +49 (0) 52 37 609 - 309

info@wineo.de

www.wineo.de

Handed over by:

Member of



wineo